SoniQuex

INTRODUCING · 2026



NEW · AC10 REFERENCE AUDIO COMPARATOR

Audio Comparator.

Switch. Compare. Decide.

A precision instrument for the one test that matters: A against B, with nothing else changed. Keep every component connected and switch between them in an instant.

Dry-contact relays

PASSIVE SIGNAL SWITCHING

Modular design

ADD CARDS ANY TIME

8 slots

ANY MIX OF CARDS

4 signal interfaces

UNBALANCED · BALANCED · OPTICAL · SPEAKER

SONIQUEX.COM

DESIGNED & MADE IN CANADA

HOW IT WORKS

Hear the difference. Not the cable swap.

Comparing DACs, amplifiers or speakers usually means re-cabling, and by then your memory of the first one has faded. The AC10 keeps everything connected and switches in a tap.

01

Connect

Plug your gear into the module cards. Each card is recognized the moment it is inserted.

02

Name

Label every jack on screen: "Denon CD Player", "Sony Pre-Amplifier".


03

Compare

Tap to route A or B. Sealed relays switch cleanly. Only the source changes.

ONE MAINFRAME, CONFIGURED YOUR WAY

8 slots · any mix · XLR uses 2

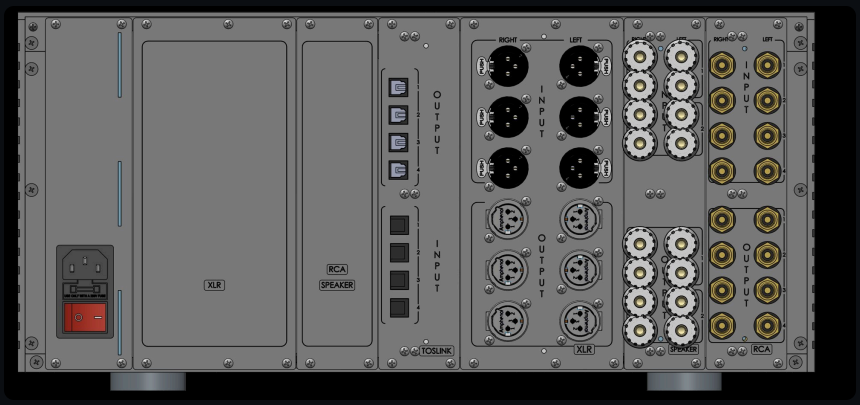

UNBALANCED	BALANCED	OPTICAL S/PDIF	SPEAKER LEVEL
RCA	**XLR**	**TOSLINK**	**Speaker**
4 IN · 4 OUT	4 IN · 4 OUT	4 IN · 4 OUT	2 IN · 2 OUT

Switching	Sealed signal relays
Control	Touchscreen + Wi-Fi / BT app
Mains	100–130 / 200–240 V~, 50/60 Hz
Size (W×D×H)	428 × 358 × 203 mm
Weight	13 kg

- **Critical listeners.** Compare a new DAC with your current one, in your own room.
- **Dealers & demo rooms.** Let customers hear the upgrade instantly.
- **Studios & reviewers.** Repeatable A/B with every component labelled.

SoniQuex

B-2305 Rue Guénette, Saint-Laurent, QC H4R 2E9, Canada

soniquex.com
info@soniquex.com
+1 514 416 2090

SCAN

Preliminary information. Specifications may change without notice. Images are renders.